arXiv:1301.2051v2 [math.DS] 22 Feb 2013

PARAMETER SPACE DIMENSION FOR NETWORKS WITH TRANSMISSION DELAYS

LEONHARD LÜCKEN[1], JAN PHILIPP PADE[1], KOLJA KNAUER[2] AND SERHIY YANCHUK[1]

[1] Institute of Mathematics, Humboldt University of Berlin, Unter den Linden 6, D-10099 Berlin, Germany

[2] Institute of Mathematics, Technical University of Berlin, Straße des 17. Juni 136, D-10623 Berlin, Germany

1. Introduction

In this paper we study a componentwise timeshift transformation (CTT) for coupled dynamical systems with transmission delays, which allows one to change the involved delays under some restrictions. We assume a network of N dynamical systems whose topology is a multigraph, which is set of nodes, $\mathcal{N}=\{1,...,N\}$, and a multiset $\mathcal{E}$ of directed edges $\ell\in\mathcal{N}\times\mathcal{N}$. The dynamics of the systems under consideration are assumed to be of the form

$$\frac{\mathrm{d}}{\mathrm{dt}}x_j(t)=f_j\left(\left(x_{s(\ell)}\left(t-\tau\left(\ell\right)\right)\right)_{\ell\in I_j}\right)\in\mathbb{R},\ j=1,...,N. \tag{1.1}$$

Here the functions

$$s:\mathcal{E}\to\mathcal{V}\text{ and }t:\mathcal{E}\to\mathcal{V},$$

identify source $s\left(\ell\right)$ and target $t\left(\ell\right)$ of a link $\ell\in\mathcal{E}$, and $I_j=\{\ell\in\mathcal{E}:\,t\left(\ell\right)=j\}$ is the input set of the node j. The time delay of the signal traveling along the link ℓ is denoted by $\tau\left(\ell\right)$. Such a function, $\tau:\mathcal{E}\to[0,\infty)$, is called a *delay distribution.* The functions $f_j:\mathbb{R}^{\#I_j}\to\mathbb{R}$ describe the dynamics of the individual systems. We will write $\boldsymbol{f}=\left(f_1,...,f_N\right)^\top$ to denote the full right hand side of (1.1). In general, boldface symbols denote vector valued variables.

The basic idea of the CTT is to introduce new variables

$$y_j\left(t\right):=x_j\left(t+\eta_j\right), \tag{1.2}$$

by shifting the cells independently in time to some extend $\eta_j\geq 0$. One readily checks that these new variables fulfill the dynamics

$$\frac{\mathrm{d}}{\mathrm{dt}}y_j(t)=f_j\left(\left(y_{s(\ell)}\left(t-\tilde{\tau}\left(\ell\right)\right)\right)_{\ell\in I_j}\right),\ j=1,...,N, \tag{1.3}$$

with modified delays $\tilde{\tau}\left(\ell\right)=\tau\left(\ell\right)-\eta_{t(\ell)}+\eta_{s(\ell)}$.

In section 4 we explain why (1.3) may possess properties which make it preferable to (1.1) and render the idea (1.2) useful. But before doing so let us pose and answer a question. What does knowledge about features of (1.3) tell us about the features of (1.1)? It might seem intuitive that they have a lot in common since the timeshift $y_j\left(t\right)\mapsto y_j\left(t-\eta_j\right)$ inverses (1.2). This is true for the particular solution (1.2), but in general, the expression $y_j\left(t-\eta_j\right)$ (with $\eta_j>0$) may not be defined at all. This is because, in general, solutions of delay differential equations (DDEs) cannot be continued backwards. Furthermore, one should introduce state spaces and flows to formulate and compare the dynamical properties of (1.1) and (1.3). This will be done in a quite general setting using semidynamical systems in section 3. Before that we study the special cases of equilibria and periodic orbits of DDEs in section 2.

2. SPECTRUM OF EQUILIBRIA AND PERIODIC ORBITS IN (1.1) AND (1.3)

An equilibrium point $\bar{\boldsymbol{x}} = (\bar{x}_1, ..., \bar{x}_N) \in \prod_{j=1}^N \mathbb{R}^{n_k}$ of (1.1), and equally for (1.3), is a point which satisfies

$$f_j\left(\left(\bar{x}_{s(\ell)}\right)_{\ell \in I_j}\right) = 0,\ j = 1, ..., N. \tag{2.1}$$

Let us assume that $f_j \in C^1$. Then, if their real parts are different from zero, the characteristic exponents of $\bar{\boldsymbol{x}}$ determine its stability. A characteristic exponent of $\bar{\boldsymbol{x}}$ in (1.1) corresponds to an exponential solution $\boldsymbol{\xi}(t) = e^{\lambda t}\boldsymbol{\xi}_0$ of the variational equation

$$\dot{\xi}_j(t) = \sum_{\ell \in I_j} \partial_\ell f_j\left(\left(\bar{x}_{s(\ell')}\right)_{\ell' \in I_j}\right) \xi_k(t - \tau(\ell)). \tag{2.2}$$

Obviously, the timeshifted variation $\boldsymbol{\chi}(t)$, given by $\chi_j(t) = \xi_j(t + \eta_j)$ is then a solution of the characteristic equation of $\bar{\boldsymbol{x}}$ in (1.3)

$$\dot{\chi}_j(t) = \sum_{\ell \in I_j} Df_j\left(\left(\bar{x}_{s(\ell')}\right)_{\ell' \in I_j}\right) \chi_k(t - \tilde{\tau}(\ell)). \tag{2.3}$$

Hence, the characteristic exponents of $\bar{\boldsymbol{x}}$ are the same in (1.1) and (1.3).

Similarly, the stability of a periodic solution $\bar{\boldsymbol{x}}(t) = \bar{\boldsymbol{x}}(t + T)$ is determined by its Floquet exponents (again, if their real parts are different from zero). Each exponent λ corresponds to a solution $\boldsymbol{\xi}(t)$ of the variational equation

$$\dot{\xi}_j(t) = \sum_{\ell \in I_j} \partial_\ell f_j\left((\bar{x}_k(t - \tau(\ell')))_{\ell' \in I_j}\right) \xi_k(t - \tau(\ell)) \tag{2.4}$$

which has the form $\boldsymbol{\xi}(t) = e^{\lambda t}\boldsymbol{p}(t)$ with a periodic function $\boldsymbol{p}(t) = \boldsymbol{p}(t + T)$. Again, the timeshifted solution $\boldsymbol{\chi}(t)$ with $\chi_j(t) = \xi_j(t + \eta_j)$ fulfills the variational equation

$$\dot{\chi}_j(t) = \sum_{\ell \in I_j} \partial_\ell f_j\left((\bar{y}_k(t - \tilde{\tau}(\ell')))_{\ell' \in I_j}\right) \chi_k(t - \tilde{\tau}(\ell)) \tag{2.5}$$

of the corresponding periodic solution $\bar{y}_j(t) = \bar{x}_j(t + \eta_j)$ in the transformed system. Let us summarize this section in a theorem:

Theorem 1. *(i) A fixed point $\bar{\boldsymbol{x}}$ possesses the same characteristic exponents in (1.1) and (1.3).*

(ii) A periodic solution $\bar{\boldsymbol{x}}(t)$ possesses the same Floquet exponents in (1.1) as the corresponding transformed solution $\bar{\boldsymbol{y}}(t)$ in (1.3).

3. The Componentwise Timeshift Transformation

3.1. **The CT-transformation.** In this section we set out to define the transformation (1.2) in a more rigorous way. Recall that the state spaces for DDEs are infinite dimensional. They have to contain segments of functions, which represent the history of the solution $\boldsymbol{x}(t)$. For the coupled system (1.1), we choose the state space to be

$$\mathcal{C} = \prod_{j=1}^{N} C\left([-r_j, 0]\,;\mathbb{R}^{n_j}\right),\ r_j = \max_{\ell \in O_j} \tau(\ell),$$

where $O_j = \{\ell \in \mathcal{E} :\ s(\ell) = j\}$ is the set of all outgoing links from the j-th cell. Similarly, we choose

$$\tilde{\mathcal{C}} = \prod_{j=1}^{N} C\left([-\tilde{r}_j, 0]\,;\mathbb{R}^{n_j}\right),\ \tilde{r}_j = \max_{\ell \in O_j} \tilde{\tau}(\ell)$$

as state space for (1.3). Assuming that solutions exist for all future times (e.g. if f_j are Lipschitz continuous), there exist semi flows

$$\begin{aligned} \Phi &: [0,\infty) \times \mathcal{C} \to \mathcal{C}, & (t, \boldsymbol{x}) &\mapsto \Phi_t(\boldsymbol{x}),\\ \Psi &: [0,\infty) \times \tilde{\mathcal{C}} \to \tilde{\mathcal{C}}, & (t, \boldsymbol{y}) &\mapsto \Psi_t(\boldsymbol{y}), \end{aligned}$$

for (1.1) and (1.3). Now let us formulate (1.2) as a state space transformation $T : \mathcal{C} \to \tilde{\mathcal{C}}$. In a natural way we define T componentwise, for $j = 1, ..., N$, as

$$T_j[\boldsymbol{x}_0](t) = \begin{cases} \left(\Phi_{t+\eta_j}(\boldsymbol{x}_0)\right)_j(0) & ,\ t \in [-\min\{\eta_j, \tilde{r}_j\}, 0],\\ \left(\boldsymbol{x}_0(t+\eta_j)\right)_j(0) & ,\ t \in [-\tilde{r}_j, -\eta_j]. \end{cases} \tag{3.1}$$

Recall that we need $\eta_j \geq 0$. Further we may assume $\min_j \eta_j = 0$ since $\tilde{\tau}(\ell)$ is invariant under a simultaneous shift $\eta_j \mapsto \eta_j + \alpha$ of all cells by a common amount α. Note that necessarily $\eta_j - \tilde{r}_j \geq r_j$, so (3.1) is well-defined [see Figure 3.1]. One easily checks that

$$T \circ \Phi = \Psi \circ T. \tag{3.2}$$

That is, T transforms solutions of (1.1) into solutions of (1.3). As inherited from the semi flow Φ, the transformation T is neither injective nor surjective in general. Therefore, one cannot expect a dynamical equivalence of (1.1) and (1.3) in the classical form of topological conjugacy, i.e.$\Psi = h \circ \Phi \circ h^{-1}$ for some homeomorphism h. We will show that they are equivalent in a very similar sense in the following section.

3.2. **CT-Equivalence.** Let us find a reverse transformation from (1.3) to (1.2). It should transform $\tilde{\tau}(\ell)$ back to $\tau(\ell)$ which defines reverse timeshifts

$$\tilde{\eta}_j = \bar{\eta} - \eta_j,\ \bar{\eta} = \max_{1 \leq j \leq N} \eta_j.$$

Analogously to (3.1), the reverse transformation $\tilde{T} : \tilde{\mathcal{C}} \to \mathcal{C}$ is given as

$$\tilde{T}_j[\boldsymbol{y}_0](t) = \begin{cases} \left(\Psi_{t+\tilde{\eta}_j}(\boldsymbol{y}_0)\right)_j(0) & ,\ t \in [-\min\{\tilde{\eta}_j, r_j\}, 0],\\ \left(\boldsymbol{y}_0(t+\tilde{\eta}_j)\right)_j(0) & ,\ t \in [-r_j, -\tilde{\eta}_j]. \end{cases} \tag{3.3}$$

Again, we have

$$\tilde{T} \circ \Psi = \Phi \circ \tilde{T}, \tag{3.4}$$

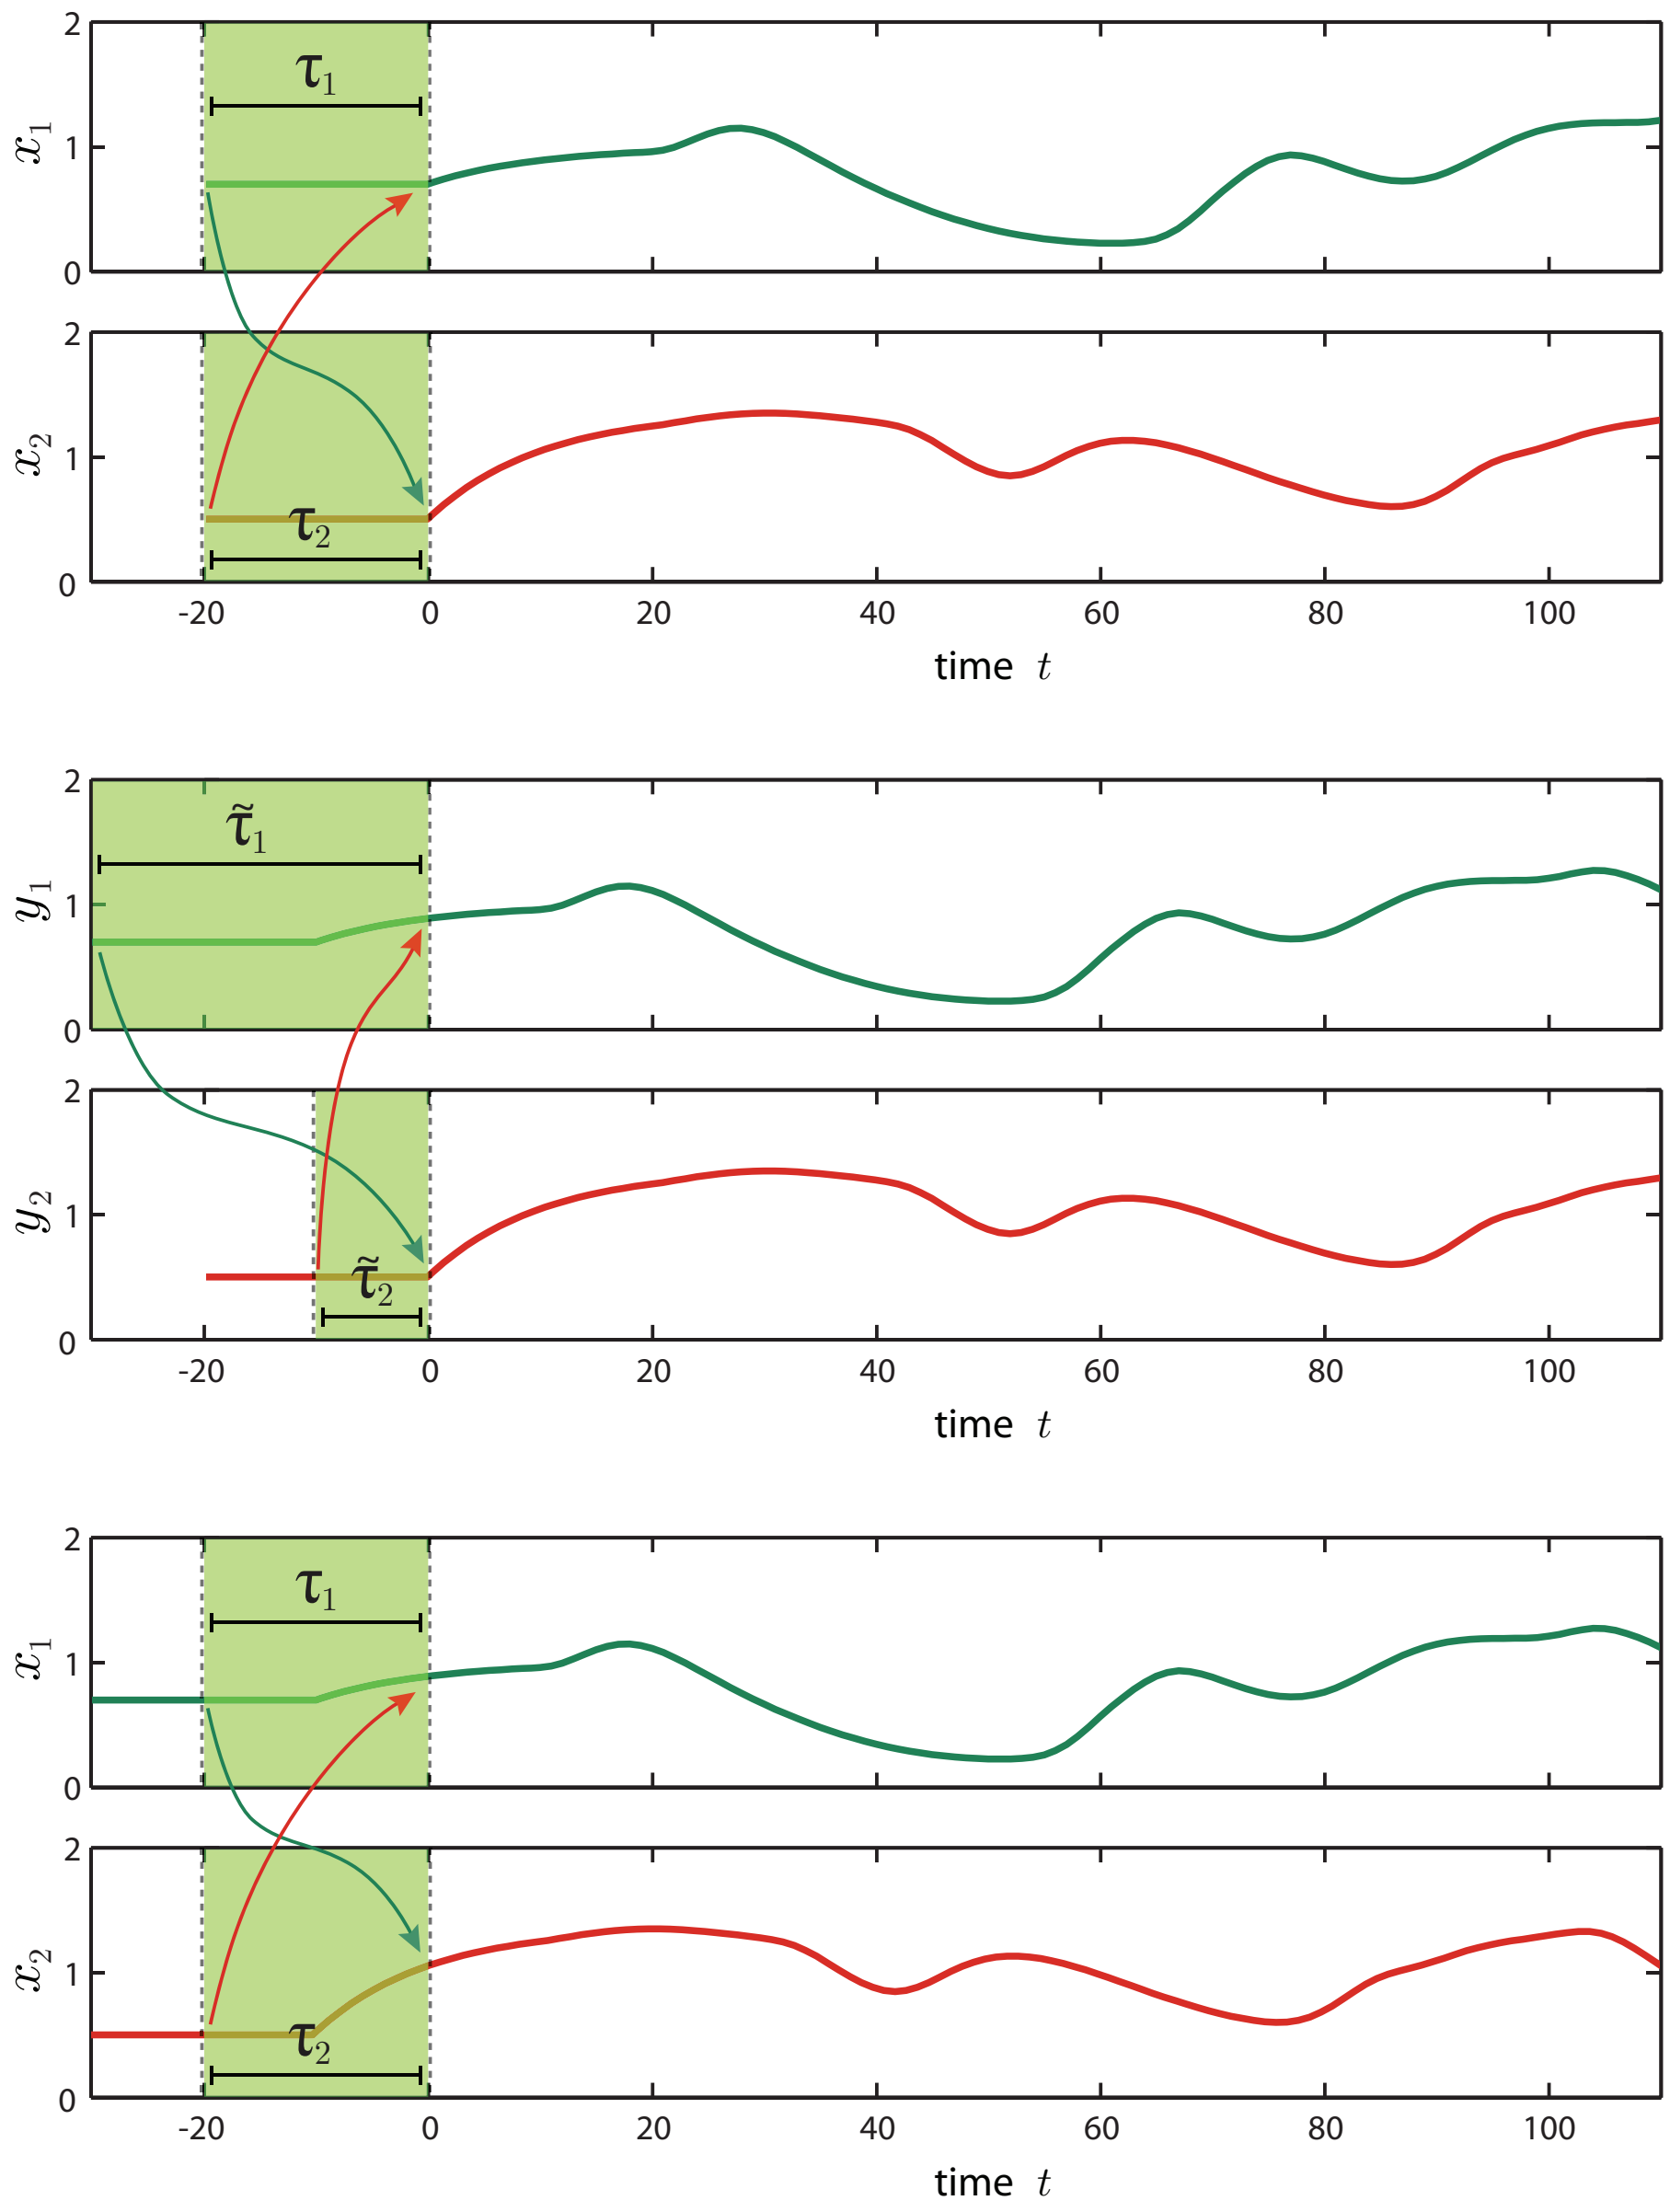

FIGURE 3.1. CT-Transfo for a pair of bidirectionally coupled systems.

and furthermore, T and $\tilde{T}$ are reverse in the sense that

$$\tilde{T} \circ T = \Phi_{\bar{\eta}} \text{ and } T \circ \tilde{T} = \Psi_{\bar{\eta}}. \tag{3.5}$$

The equations (3.2), (3.4) and (3.5) constitute a notion of equivalence which can be applied not only to semidynamical systems which stem from systems of DDEs, but as well from delay coupled PDEs for instance. Therefore we define in a more abstract fashion.

Definition 2. Two semidynamical systems $\Phi : [0, \infty) \times X \to X$ and $\Psi : [0, \infty) \times Y \to Y$ are called *CT-equivalent* if there exist mappings $T : X \to Y$, $\tilde{T} : Y \to X$ and $\bar{\eta} \geq 0$ such that

$$T \circ \tilde{T} = \Psi_{\bar{\eta}},\ T \circ \Phi_t = \Psi_t \circ T,$$
$$\tilde{T} \circ T = \Phi_{\bar{\eta}},\ \tilde{T} \circ \Psi_t = \Phi_t \circ \tilde{T}.$$

We still use term CT-equivalence for the general formulation since, most probably, the equivalent systems Φ and Ψ will in practice be connected by a transformation as the componentwise timeshift (3.1).

3.3. **Dynamical Invariants of CT-Equivalent Semidynamical Systems.**

In this section, we will infer some properties of CT-equivalent systems. Their state spaces hold a structure of corresponding strongly invariant sets. We prove, that stability properties are preserved as well, presuming that the reverse CT-transformations T and $\tilde{T}$ from Definition 2 are Lipschitz continuous. For the DDE systems (1.1) and (1.3) this is the case if all f_j are Lipschitz continuous. Throughout this section, we assume that X and Y are Banach spaces.

Before stating the main theorem of this section, we give some definitions:

Definition 3. A set $A \subseteq X$ is called *invariant* if for any $t \geq 0$,

$$\Phi_t(A) = A.$$

For any set $A \subseteq X$, we define its *strongly invariant hull* $H_\Phi(A)$ as the set

$$H_\Phi(A) := \{\boldsymbol{x} \in X \mid \exists t_1, t_2 \geq 0,\ \hat{\boldsymbol{x}} \in A :\ \Phi_{t_1}(\hat{\boldsymbol{x}}) = \Phi_{t_2}(\boldsymbol{x})\}.$$

A *strongly invariant set* $A \subseteq X$ is a set that coincides with its strongly invariant hull, i.e.

$$A = H_\Phi(A).$$

The class of strongly invariant sets is denoted by

$$\operatorname{sis}(\Phi) = \{A \subseteq X \mid A = H_\Phi(A)\}.$$

Theorem 4. *Let $\Phi : [0, \infty) \times X \to X$ and $\Psi : [0, \infty) \times Y \to Y$ be CT-equivalent. Then,*

(i) for each (positively) invariant set $A \in \mathcal{C}$, the set $T[A] \in Y$ is (positively) invariant,

(ii) there is a one-to-one correspondence between (strongly) invariant sets.

Proof. Ad (i): Let A be positively invariant, $\boldsymbol{x} \in A$ and $\boldsymbol{y} = T[\boldsymbol{x}]$. Then, $\Psi_t(\boldsymbol{y}) = T[\Phi_t(\boldsymbol{x})] \in T[A]$. Hence $T[A]$ is positively invariant. If A is invariant, then for each $\boldsymbol{x} \in A$ and each $t \in [0, \infty)$ there is an $\boldsymbol{x}_{-t} \in A$ such that $\Phi_t(\boldsymbol{x}_{-t}) = \boldsymbol{x}$ and correspondingly for each $\boldsymbol{y} = T[\boldsymbol{x}] \in T[A]$ there is $\boldsymbol{y}_{-t} = T[\boldsymbol{x}_{-t}]$ with

$$\Psi_t(\boldsymbol{y}_{-t}) = T[\Phi_t(\boldsymbol{x}_{-t})] = T[\boldsymbol{x}] = \boldsymbol{y}.$$

Ad (ii): Let $A \in \operatorname{sis}(\Phi)$. We define a corresponding set $\tilde{A} = H_\Psi(T[A]) \in \operatorname{sis}(\Psi)$. Claim (i) is proven via

$$(H_\Phi \circ \tilde{T}) \circ (H_\Psi \circ T) = \mathrm{id}_{\operatorname{sis}(\Phi)} \text{ and } (H_\Psi \circ T) \circ (H_\Phi \circ \tilde{T}) = \mathrm{id}_{\operatorname{sis}(\Psi)},$$

where, by symmetry, it suffices to show only one equality. Let $\boldsymbol{y} \in \tilde{A}$, then there exist $t_1, t_2 \geq 0$ and $\hat{\boldsymbol{y}} = T\left[\hat{\boldsymbol{x}}\right] \in T\left[A\right]$ such that $\Psi_{t_2}\left(\boldsymbol{y}\right) = \Psi_{t_1}\left(\hat{\boldsymbol{y}}\right) \in \tilde{A}$. Thus,

$$\begin{aligned}
\Phi_{t_2}\left(\tilde{T}\left[\boldsymbol{y}\right]\right) &= \tilde{T}\left[\Psi_{t_2}\left(\boldsymbol{y}\right)\right] = \tilde{T}\left[\Psi_{t_1}\left(\hat{\boldsymbol{y}}\right)\right] \\
&= \tilde{T}\left[\Psi_{t_1}\left(T\left[\hat{\boldsymbol{x}}\right]\right)\right] = \tilde{T}\left[T\left[\Phi_{t_1}\left(\hat{\boldsymbol{x}}\right)\right]\right] \\
&= \Phi_{t_1+\bar{\eta}}\left(\hat{\boldsymbol{x}}\right) \in H_\Phi\left(A\right) = A.
\end{aligned}$$

Hence, $\tilde{T}\left[\boldsymbol{y}\right] \in A$. That is, $\tilde{T}\left[\tilde{A}\right] \subseteq A$ and $H_\Phi\left(\tilde{T}\left[\tilde{A}\right]\right) \subseteq A$. We have also shown that for $\hat{\boldsymbol{x}} \in A$, $\Phi_{t_1+\bar{\eta}}\left(\hat{\boldsymbol{x}}\right) \in \tilde{T}\left[\tilde{A}\right]$ and therefore $\hat{\boldsymbol{x}} \in H_\Phi\left(\tilde{T}\left[\tilde{A}\right]\right)$. This yields $A \subseteq H_\Phi\left(\tilde{T}\left[\tilde{A}\right]\right) \subseteq A$, i.e. $A = H_\Phi\left(\tilde{T}\left[\tilde{A}\right]\right)$ and $\left(H_\Phi \circ \tilde{T}\right) \circ \left(H_\Psi \circ T\right) = \mathrm{id}_{\mathrm{sis}(\Phi)}$.

For invariant sets, the one-to-one correspondence is mediated directly via T and $\tilde{T}$. $\square$

Definition 5. The *maximal Lyapunov exponent (MLE)* of a point $\boldsymbol{x} \in X$ with respect to a semidynamical system $\Phi : [0, \infty) \times X \to X$ on a Banach space X is defined as

$$\lambda\left(\boldsymbol{x}\right) := \limsup_{t\to\infty} \limsup_{|\xi|\searrow 0} \frac{1}{t} \ln\left(\frac{\left|\Phi_t\left(\boldsymbol{x}+\xi\right) - \Phi_t\left(\boldsymbol{x}\right)\right|}{|\xi|}\right) \in [0, \infty].$$

The MLE of $\boldsymbol{x} \in A \subseteq X$ with respect to the set A is defined as

$$\begin{aligned}
\lambda\left(x, A\right) &:= \limsup_{t\to\infty} \limsup_{|\xi|\searrow 0} \min_{a\in A} \frac{1}{t} \ln\left(\frac{\left|\Phi_t\left(\boldsymbol{x}+\xi\right) - a\right|}{|\xi|}\right) \\
&= \limsup_{t\to\infty} \limsup_{|\xi|\searrow 0} \frac{1}{t} \ln\left(\frac{\operatorname{dist}\left(\Phi_t\left(\boldsymbol{x}+\xi\right), A\right)}{|\xi|}\right).
\end{aligned}$$

The MLE of a set $A \in X$ is defined as $\lambda\left(A\right) = \sup_{\boldsymbol{x}\in A} \lambda\left(\boldsymbol{x}, A\right)$.

Theorem 6. *Let the CT-transformations T and $\tilde{T}$ be Lipschitz-continuous and let X, Y be Banach spaces. Then,*

(i) corresponding (strongly) invariant sets of Φ and Ψ possess the same maximal Lyapunov exponents (MLEs),

(ii) for each positively invariant set $A \in \mathcal{C}$, the set $T\left[A\right] \in \tilde{\mathcal{C}}$ has the same type of stability.

Claim (i) is a direct consequence of the following Lemma.

Lemma 7. *Let X, Y be Banach spaces and let T and $\tilde{T}$ be Lipschitz-continuous with constants L_T and $L_{\tilde{T}}$. Then, we have $\lambda\left(\boldsymbol{x}\right) \leq \lambda\left(T\left[\boldsymbol{x}\right]\right) \leq \lambda\left(\Phi_{\bar{\eta}}\left(\boldsymbol{x}\right)\right)$ for all $\boldsymbol{x} \in X$.*

Proof. For each $\boldsymbol{x}, \boldsymbol{\chi} \in \mathcal{C}$, $t \geq \bar{\eta}$:

$$\begin{aligned}
&\frac{1}{t} \ln\left(\frac{\left|\Phi_t\left(\boldsymbol{x}\right) - \Phi_t\left(\boldsymbol{x}+\boldsymbol{\chi}\right)\right|}{|\boldsymbol{\chi}|}\right) \\
= \ &\frac{1}{t} \ln\left(\frac{\left|\Phi_{t-\bar{\eta}}\left(\tilde{T}\circ T\left[\boldsymbol{x}\right]\right) - \Phi_{t-\bar{\eta}}\left(\tilde{T}\circ T\left[\boldsymbol{x}+\boldsymbol{\chi}\right]\right)\right|}{|\boldsymbol{\chi}|}\right) \\
= \ &\frac{1}{t} \ln\left(\frac{\left|\tilde{T}\circ\Psi_{t-\bar{\eta}}\left(T\left[\boldsymbol{x}\right]\right) - \tilde{T}\circ\Psi_{t-\bar{\eta}}\left(T\left[\boldsymbol{x}\right]+\boldsymbol{\xi}\right)\right|}{|\boldsymbol{\chi}|}\right),
\end{aligned}$$

with $|\boldsymbol{\xi}| = |T[\boldsymbol{x}+\boldsymbol{\chi}] - T[\boldsymbol{x}]| \leq L_T\,|\boldsymbol{\chi}|$,

$$\begin{aligned} \ldots \quad &\leq \frac{1}{t}\ln\left(\frac{L_{\tilde{T}}\,|\Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]) - \Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]+\boldsymbol{\xi})|}{(|\boldsymbol{\xi}|/L_T)}\right) \\ &= \frac{1}{t}\ln\left(\frac{|\Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]) - \Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]+\boldsymbol{\xi})|}{|\boldsymbol{\xi}|}\right) + \frac{1}{t}\ln\left(L_T L_{\tilde{T}}\right) \end{aligned}$$

Therefore,

$$\frac{1}{t}\ln\left(\frac{|\Phi_t(\boldsymbol{x}) - \Phi_t(\boldsymbol{x}+\boldsymbol{\chi})|}{|\boldsymbol{\chi}|}\right) \leq \frac{1}{t}\ln\left(\frac{|\Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]) - \Psi_{t-\bar{\eta}}(T[\boldsymbol{x}]+\boldsymbol{\xi})|}{|\boldsymbol{\xi}|}\right),$$

and, thus,

$$\lambda(\boldsymbol{x}) \leq \lambda(T[\boldsymbol{x}]).$$

The same reasoning for $\boldsymbol{y} = T[\boldsymbol{x}]$ gives

$$\lambda(\boldsymbol{x}) \leq \lambda(T[\boldsymbol{x}]) \leq \lambda(\Phi_{\bar{\eta}}(\boldsymbol{x})).$$

□

Proof. (of Theorem 6) Lemma 7 implies claim (i). To see that consider two corresponding sets $A \in \mathrm{sis}(\Phi)$ and $\tilde{A} \in \mathrm{sis}(\Psi)$. Then it is impossible that $\lambda(A) > \lambda\left(\tilde{A}\right)$ since for any $\boldsymbol{x} \in A$ there exists $\boldsymbol{y} = T[\boldsymbol{x}] \in \tilde{A}$ such that $\lambda(\boldsymbol{x}) \leq \lambda(\boldsymbol{y})$. The same holds vice versa and therefore $\lambda(A) = \lambda\left(\tilde{A}\right)$. Similarly, one shows this for the case of invariant sets.

Ad (ii): Let $A \in \mathcal{C}$ be an (asymptotically) stable positively invariant set. We show that if A is (asymptotically) stable so is $T[A]$. Let $\varepsilon > 0$, $\boldsymbol{y}_0 = T[\boldsymbol{x}_0] \in T[A]$ and $\boldsymbol{\xi}_0 \in \tilde{\mathcal{C}}$ a small initial perturbation, i.e. $|\boldsymbol{\xi}_0| \leq \delta$ with $\delta = \delta(\varepsilon) > 0$ to be specified later. Define the perturbed solution

$$\tilde{\boldsymbol{y}}_t = \Psi_t(\boldsymbol{y}_0 + \boldsymbol{\xi}_0) = \boldsymbol{y}_t + \boldsymbol{\xi}_t,$$

where $\boldsymbol{y}_t = \Psi_t(\boldsymbol{y}_0)$ is the unperturbed solution. Consider

$$\begin{aligned} \tilde{\boldsymbol{x}}_t : \quad &= \tilde{T}[\tilde{\boldsymbol{y}}_t] = \tilde{T}[\Psi_t(\boldsymbol{y}_0 + \boldsymbol{\xi}_0)] \\ &= \Phi_t\left(\tilde{T}[\boldsymbol{y}_0 + \boldsymbol{\xi}_0]\right) \\ &= \Phi_t\left(\tilde{T}\circ T[\boldsymbol{x}_0] + \left(\tilde{T}[\boldsymbol{y}_0 + \boldsymbol{\xi}_0] - \tilde{T}[\boldsymbol{y}_0]\right)\right) \\ &= \Phi_t\left(\boldsymbol{x}_{\bar{\eta}} + \boldsymbol{\chi}_{\bar{\eta}}\right), \end{aligned}$$

with

$$\begin{aligned} \left|\boldsymbol{\chi}_{\bar{\eta}}\right| \quad &= \quad \left|T[\boldsymbol{y}_0 + \boldsymbol{\xi}_0] - \tilde{T}[\boldsymbol{y}_0]\right| \\ &\leq \quad L_{\tilde{T}} \cdot \delta, \end{aligned}$$

where $L_{\tilde{T}}$ is the Lipschitz constant of $\tilde{T}$. Since $\boldsymbol{x}_{\bar{\eta}} \in A$ and A is (asymptically) stable, we can find a $\delta = \delta(\varepsilon)$ such that

$$\mathrm{d}(\tilde{\boldsymbol{x}}_t, A) \leq \frac{\varepsilon}{L_T},$$

and, in case of asymptotic stability, such that

$$\tilde{\boldsymbol{x}}_t \to A.$$

This means, we can represent $\tilde{\boldsymbol{x}}_t$ as $\tilde{\boldsymbol{x}}_t = \boldsymbol{a}_t + \boldsymbol{\chi}_t$ with $\boldsymbol{a}_t \in A$, $|\boldsymbol{\chi}_t| \leq \frac{\varepsilon}{L_T}$ and, in case of asymptotic stability, $|\boldsymbol{\chi}_t| \to 0$, for $t \to \infty$. Note that $t \mapsto \boldsymbol{a}_t$ has not to be a solution. Define $\boldsymbol{b}_t = T[\boldsymbol{a}_t] \in T[A]$. Then,

$$\begin{aligned} \left|\tilde{\boldsymbol{y}}_{t+\bar{\eta}} - \boldsymbol{b}_t\right| &= \left|T \circ \tilde{T}[\tilde{\boldsymbol{y}}_t] - T[\boldsymbol{a}_t]\right| \\ &= |T[\boldsymbol{a}_t + \boldsymbol{\chi}_t] - T[\boldsymbol{a}_t]| \\ &\leq L_T |\boldsymbol{\chi}_t| \leq \varepsilon \end{aligned}$$

and $\left|\tilde{\boldsymbol{y}}_{t+\bar{\eta}} - \boldsymbol{b}_t\right| \to 0$, if A is asymptotically stable. This completes the proof. □

4. Reduction of Delay-Parameters

The Theorems 4 and 6 show that CT-equivalence is indeed a very strong equivalence. For the most cases one is very well advised to study the systems which possess the most convenient distribution of delays within the concerned equivalence class. In section 4.1 we will show, that it is always possible to find timeshifts η_j, $j = 1, ..., N$, such that the number of different delays in system (1.1) reduces to the cycle space dimension $C = L - N + 1$ of the network, where $L = \#\mathcal{E}$ is the number of links and $N = \#\mathcal{N}$ is the number of cells. Effectively, this means that no more than C delay-parameters have to be taken into account during investigation. That this number cannot be reduced further is shown in section 4.2.

4.1. **Finding an Instantaneous Spanning Tree.**

Definition 8. A semicycle $c = (\ell_1, ..., \ell_k)$ is a closed path in the undirected graph which is obtained by dropping the orientation from all links. The *delay sum* of a semicycle $c = (\ell_1, ..., \ell_k)$ with respect to a delay distribution is

$$\Sigma_\tau(c) := \sum_{j=1}^{k} \sigma_j \tau(\ell_j),$$

where $\sigma_j \in \{\pm 1\}$ indicates whether the link ℓ_j points in the same direction as ℓ_1 ($\sigma_j = 1$) or not ($\sigma_j = 0$). The *roundtrip* of c is the modulus of its delay sum

$$\mathrm{rt}(c) := |\Sigma(c)|.$$

Lemma 9. *Let $\tau, \tilde{\tau} : \mathcal{E} \to [0, \infty)$ be two delay distributions in a connected network. Then, the following statements are equivalent.*

(i) There exist $\eta_j \in \mathbb{R}$, $j = 1, ..., N$, such that $\tilde{\tau}(\ell) = \tau(\ell) - \eta_{t(\ell)} + \eta_{s(\ell)}$.

(ii) For all semicycles c of the network,

$$\Sigma_\tau(c) = \Sigma_{\tilde{\tau}}(c).$$

Proof. $(i) \Rightarrow (ii)$ Indeed, for any cycle $c = (\ell_1, ..., \ell_k)$ we have

$$\begin{aligned} \Sigma_{\tilde{\tau}}(c) &= \sum_{j=1}^{k} \sigma_j \tilde{\tau}(\ell_j) \\ &= \sum_{j=1}^{k} \sigma_j \left(\tau(\ell_j) - \eta_{t(\ell_j)} + \eta_{s(\ell_j)}\right) \\ &= \Sigma_\tau(c) + \sum_{j=1}^{k} \sigma_j \left(\eta_{s(\ell_j)} - \eta_{t(\ell_j)}\right) \\ &= \Sigma_\tau(c). \end{aligned}$$

$(ii) \Rightarrow (i)$ Select an arbitrary spanning tree $S = (\ell_1, ..., \ell_{N-1})$. Select $\xi = (\xi_1, ..., \xi_N)$ and $\chi = (\chi_1, ..., \chi_N)$ such that $\tau(\ell_j) = \xi_{t(\ell_j)} - \xi_{s(\ell_j)}$ and $\tilde{\tau}(\ell_j) = \chi_{t(\ell_j)} - \chi_{s(\ell_j)}$ for $j = 1, ..., N-1$. (Note that both defining sets of equations are inhomogenous linear systems of type $\mathbb{R}^{N\times(N-1)}$ and of rank $N-1$. Therefore they possess solutions.) The shifts ξ and χ define distributions (with possibly negative values)

$$\begin{aligned} \hat{\tau}_1(\ell) &= \tau(\ell) - \xi_{t(\ell)} + \xi_{s(\ell)}, \\ \hat{\tau}_2(\ell) &= \tilde{\tau}(\ell) - \chi_{t(\ell)} + \chi_{s(\ell)}. \end{aligned}$$

Both, $\hat{\tau}_1$ and $\hat{\tau}_2$, are instantaneous along S, i.e., $\hat{\tau}_1(\ell) = \hat{\tau}_2(\ell) = 0$ for $\ell \in S$. Each link ℓ which is not in S (i.e., a fundamental link) corresponds to a semicycle c and is the only link in c which may hold a non-zero value $\hat{\tau}_1(\ell)$ or $\hat{\tau}_2(\ell)$, respectively. By the part $(i) \Rightarrow (ii)$ we have

$$\hat{\tau}_1(\ell) = \Sigma_\tau(c) = \Sigma_{\tilde{\tau}}(c) = \hat{\tau}_2(\ell).$$

Hence $\hat{\tau}_1 = \hat{\tau}_2$. With $\eta_j := \xi_j - \chi_j$ this gives

$$\tilde{\tau}(\ell) = \tau(\ell) - \eta_{t(\ell)} + \eta_{s(\ell)}.$$

□

Note that η_j can always be chosen to be non-negative since a simultaneous shift $\eta_j \mapsto \eta_j + \bar{\eta}$ by some amount $\bar{\eta} \in \mathbb{R}$ does not change the resulting transformed distribution $\tilde{\tau}$.

Let a network with delayed connections be given as a set of nodes $\mathcal{N} = \{1, ..., N\}$, a set of links $\mathcal{L} \subset \mathcal{N} \times \mathcal{N}$, and a function $\tau : \mathcal{L} \to \mathbb{R}_{\geq 0}$ which assigns to a link $\ell \in \mathcal{L}$ its delay $\tau(\ell)$. For the link $\ell = (k, j)$ which connects from node k to node j we define its *source* $s(\ell) := k$ and *target* $t(\ell) := j$. The componentwise timeshift transformation [Eq. (3) of the main text] with timeshifts η_j, $j = 1, ..., N$, then acts on the delays as

$$\tau(\ell) \mapsto \tilde{\tau}(\ell) = \tau(\ell) + \eta_{s(\ell)} - \eta_{t(\ell)}.$$

Theorem 10. *For every connected network with dynamics given by Eq. (1) of the main text, there exists a spanning tree S and timeshifts η_j such that in the transformed system (4) all links $\ell \in S$ are instantaneous,*

$$\tilde{\tau}(\ell) = 0, \text{ for } \ell \in S,$$

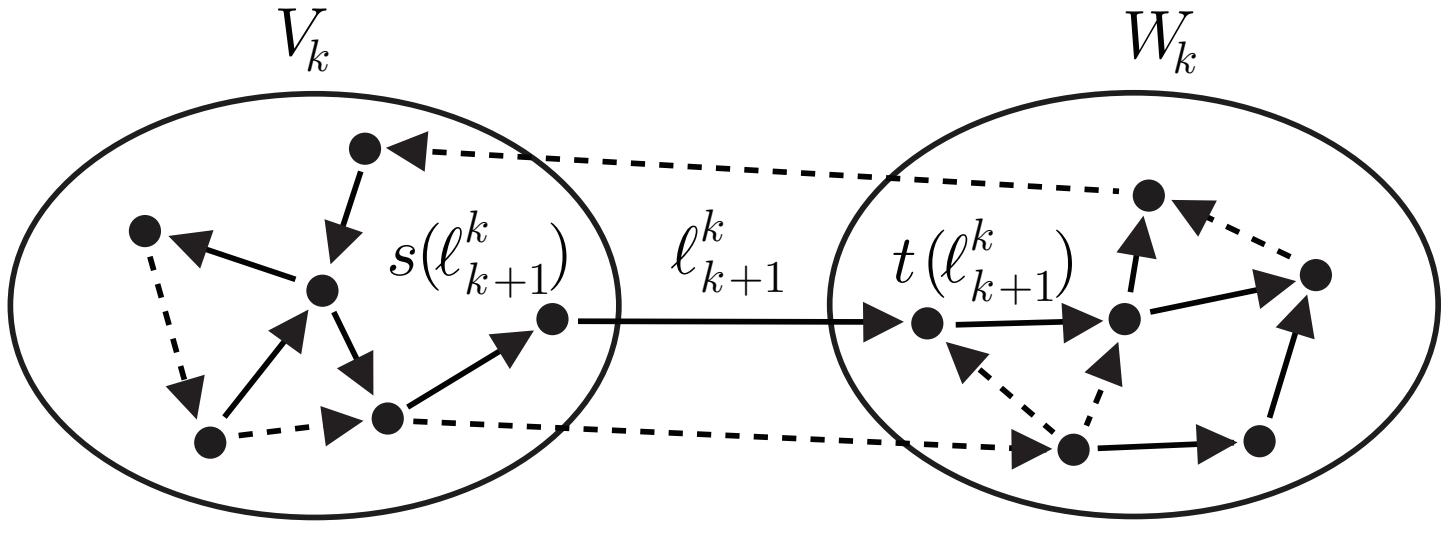

Figure 4.1. Illustration of the fundamental section corresponding to the link $\ell^* = \ell_{k+1}^{k}$ in the spanning tree S_k (solid links). Links which are not contained in S_k are indicated by dashed lines.

and for each link ℓ outside the spanning tree the delay $\tilde{\tau}(\ell)$ equals to the roundtrip $T(c(\ell))$ [Eq. (5)] along the corresponding fundamental cycle $c(\ell)$,

$$\tilde{\tau}(\ell) = T(c(\ell)), \text{ for } \ell \notin S.$$

Proof. The main idea of the algorithm is as follows. The timeshifts are changes interatively with η_j^k denoting their values at the k-th stage ($k = 0, ..., N-1$) such that, at stage k all links ℓ possess non-negative delays $\tau^k(\ell) \geq 0$ in the transformed system (4) with $\eta_j = \eta_j^k$. At each stage we create a spanning tree S_k containing k instantaneous links. Finally, we obtain timeshifts η_j^{N-1} and a spanning tree $S = S_{N-1}$ whose links are all instantaneous in (4) with $\eta_j = \eta_j^{N-1}$. Let us describe the algorithm in detail.

Initial stage:

Select a spanning tree $S_0 = \left\{\ell_1^0, ..., \ell_{N-1}^0\right\}$ in the following way. Firstly, pick a link ℓ_1^0 with minimal delay, i.e., $\tau\left(\ell_1^0\right) = \min_{\ell\in\mathcal{L}}\{\tau(\ell)\}$. Proceed adding the links $\ell_2^0, ..., \ell_j^0$ with minimal delays as long as the set $S_0^j = \left\{\ell_1^0, ..., \ell_j^0\right\}$ remains cycle-free. If at the j-th step the minimal link would create a cycle, do not add it but ignore it for the rest of this stage. We obtain the spanning tree $S_0 = S_0^{N-1}$. Let $h \in \{0, ..., N-1\}$ be the number of instantaneous links, $\ell \in S_0$ with $\tau(\ell) = 0$. Define $S_h := S_0$, $\eta_j^h := 0$, $j = 1, ..., N$, and $\tau^h(\ell) = \tau(\ell)$ for $\ell \in \mathcal{L}$. Continue with stage $h \geq 0$.

Stage k ($k \in \{0, ..., N-2\}$):

We are provided with timeshifts $\eta_j^{(k)}$, $j = 1, ..., N$, such that the transformed system (4) with $\eta_j = \eta_j^k$ possesses a spanning tree $S_k = \left\{\ell_1^k, ..., \ell_{N-1}^k\right\}$ with exactly k instantaneous links. This spanning tree was constructed with respect to $\tau^k(\ell) = \tau(\ell) + \eta_{s(\ell)}^k - \eta_{t(\ell)}^k$ as S_0 was constructed in the initial stage with respect to $\tau(\ell)$. Choosing indices according to $\tau^k\left(\ell_j^k\right) \leq \tau^k\left(\ell_{j+1}^k\right)$, we have $\tau^k\left(\ell_j^k\right) = 0$, for $j = 1, ..., k$ and the link $\ell^* = \ell_{k+1}^k$ has a minimal positive delay $\tau^k(\ell^*)$ of all links in S_k. Take the fundamental section corresponding to ℓ^*. This means, we create the unique subsets of nodes V_k and W_k of $\mathcal{N}$ with $s(\ell^*) \in V_k$ and $t(\ell^*) \in W_k$, such that all other $\ell \in S_k$ do not connect V_k and W_k (see Fig. 4.1).

Note that, by construction of S_k, the link $\ell^* = \ell_{k+1}^k$ has minimal delay of all links between V_k and W_k. Since, if there were a smaller delay $\tau^k(\ell) < \tau^k(\ell^*)$ on another connecting link ℓ, we would have picked ℓ instead of ℓ^* during the construction of

S_k. Next, we define new timeshifts $\tilde{\eta}_j^k$ as

$$\tilde{\eta}_j^k = \begin{cases} \eta_j^k + \tau^k\left(\ell^*\right), & \text{for } j \in W_k, \\ \eta_j^k, & \text{for } j \in V_k. \end{cases}$$

The transformed system (4) with $\eta_j = \tilde{\eta}_j^k$ then has delays

$$\tilde{\tau}^k\left(\ell\right) = \begin{cases} \tau^k\left(\ell\right), & \text{for } \left\{s\left(\ell\right), t\left(\ell\right)\right\} \subset V_k \text{ or } \left\{s\left(\ell\right), t\left(\ell\right)\right\} \subset W_k, \\ \tau^k\left(\ell\right) - \tau^k\left(\ell^*\right), & \text{for } s\left(\ell\right) \in V_k \text{ and } t\left(\ell\right) \in W_k, \\ \tau^k\left(\ell\right) + \tau^k\left(\ell^*\right), & \text{for } s\left(\ell\right) \in W_k \text{ and } t\left(\ell\right) \in V_k. \end{cases}$$

We have $\tilde{\tau}^k\left(\ell_j^k\right) = 0$, for all $j = 1, ..., k+1$, and $\tilde{\tau}^k\left(\ell\right) \geq 0$ for all links ℓ. Now, as in the initial stage, select a new spanning tree S_{k+h} beginning by adding the instantaneous links $\ell_1^k, ..., \ell_{k+1}^k$. Then it has $k+h > k$ instantaneous connections in (4) with $\eta_j = \eta_j^{k+h} = \tilde{\eta}_j^k$. If $k+h = N-1$, the algorithm succeeded, elsewise, proceed with stage $k+h$.

The statement that $\tilde{\tau}\left(\ell\right) = T\left(c\left(\ell\right)\right)$ for $\ell \notin S$ follows from Lemma 9, since $\tilde{\tau}\left(\ell\right) \geq 0$. □

4.2. **Genericity of the Dimension of the Delay Parameter Space.** We call C the *essential number* of delays since it is the minimal number of different delays to which the number of delays in a network can be reduced generically. Here, generically means that the conditions which allow for further reduction of delays form a nullset in the parameter space of delays $\mathbb{R}_{\geq 0}^L = \left\{\left(\tau\left(\ell\right)\right)_{\ell \in \mathcal{E}} : \tau\left(\ell\right) \geq 0\right\}$ of the original system. The reducibility condition to m different delays is described by the L linear equations

$$\eta_{t(\ell)} - \eta_{s(\ell)} + \tilde{\tau}\left(\ell\right) = \tau\left(\ell\right), \ \ell \in I_j, \tag{4.1}$$

with the restriction for $\tilde{\tau}\left(\ell\right)$ to take one of m different values $\{\theta_1, ..., \theta_m\}$. System (4.1) can be equivalently written in the vector form $G_q\mathbf{v} = \boldsymbol{\tau}$, where $\mathbf{v}$ is the $(N+m)$-dimensional vector of unknowns $\mathbf{v} = (\eta_1, \ldots, \eta_N, \theta_1, \ldots \theta_m)$ and $\boldsymbol{\tau}$ is the L-dimensional vector of delays $\tau\left(\ell\right)$. For any fixed assignment $\tilde{\tau}\left(\ell\right) = \theta_{q(\ell)}$, $\ell \in I_j$, with $q : I_j \to \{0, ..., m\}$, and $\theta_0 := 0$, one obtains a different matrix $G_q \in \mathbb{R}^{L \times (N+m)}$. It can further be shown that the rank of the matrix G_q is smaller than $N-1+m$. This implies for $m < C = L-(N-1)$ that $N-1+m < L$. Hence, the number of equations in (4.1) is larger than the number of unknowns. Such equation cannot be solved generically, unless the given delays $\tau\left(\ell\right)$ satisfy some special condition of positive codimension.